


TECHNICAL DATA




SXR - without screw

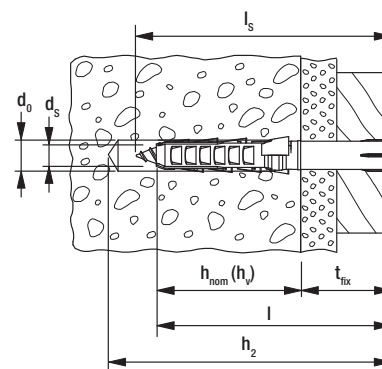


Item	Art.-No.	Drill hole diameter d_0 [mm]	Min. drill hole depth for through fixings h_2 [mm]	Min. anchorage depth $h_{nom} (h_v)$ [mm]	Anchor length l [mm]	Screw diameter d_s [mm]	Min. screw length l_s [mm]	Max. fixture thickness t_{fix} [mm]	Sales unit [pcs]
SXR 6 x 35	503228	6	45	30	35	4,5	40	5	100
SXR 6 x 50	503229	6	60	30	50	4,5	55	20	100
SXR 6 x 60	503230	6	70	30	60	4,5	65	30	100
SXR 8 x 60	506194	8	70	50	60	5,5 - 6,0	65	10	100
SXR 8 x 80	506196	8	90	50	80	5,5 - 6,0	85	30	100
SXR 8 x 100	506198	8	110	50	100	5,5 - 6,0	125	50	100
SXR 8 x 120	506199	8	130	50	120	5,5 - 6,0	105	70	100

TECHNICAL DATA



SXR-Z - with zinc-plated countersunk head screw with cross drive PZ

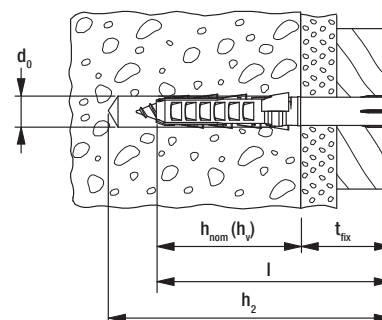

Item	Art.-No.	Drill hole diameter d_0 [mm]	Min. drill hole depth for through fixings h_2 [mm]	Min. anchorage depth $h_{nom} (h_v)$ [mm]	Anchor length l [mm]	Max. fixture thickness t_{fix} [mm]	Drive	Sales unit [pcs]
SXR 6 x 60 Z	503233 ¹⁾	6	70	30	60	30	PZ2	50

¹⁾ not pre-assembled