


TECHNICAL DATA




Plug **SX** with rim



Plug **SX** - with greater anchorage depth, without rim

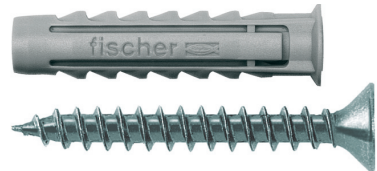

Plug **SX** with rim and screw

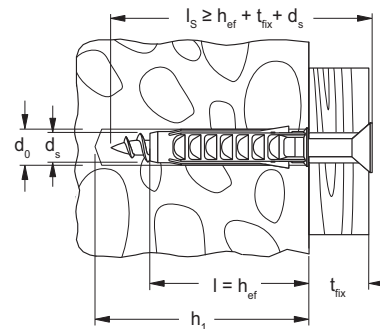

	With rim	With greater anchorage depth, without rim	With rim and screw	Drill hole diameter d_0 [mm]	Min. drill hole depth h_1 [mm]	Anchor length l [mm]	Wood and chip-board screws $d_s / d_s \times l_s$ [mm]	Max. fixture thickness t_{fix} [mm]	Sales unit [pcs]
Item	SX	SX	SX-S						
SX 4 x 20	070004	—	—	4	25	20	2 - 3	—	200
SX 5 x 25	070005	—	—	5	35	25	3 - 4	—	100
SX 6 x 30	070006	—	—	6	40	30	4 - 5	—	100
SX 6 x 30	—	—	070021	6	45	30	4,5 x 40	5	50
SX 6 x 50	078185	024827	—	6	60	50	4 - 5	—	100
SX 8 x 40	070008	—	—	8	50	40	4,5 - 6	—	100
SX 8 x 40	—	—	070022	8	65	40	5 x 60	15	50
SX 8 x 65	—	024828	—	8	75	65	4,5 - 6	—	50
SX 10 x 50	070010	—	—	10	70	50	6 - 8	—	50
SX 10 x 80	—	024829	—	10	95	80	6 - 8	—	25
SX 12 x 60	070012	—	—	12	80	60	8 - 10	—	25
SX 14 x 70	070014	—	—	14	90	70	10 - 12	—	20
SX 16 x 80	070016	—	—	16	100	80	12 (1/2")	—	10

TECHNICAL DATA



SX in bucket

Item	Art.-No.	Drill hole diameter d_0 [mm]	Min. drill hole depth h_1 [mm]	Anchor length l [mm]	Max. fixture thickness t_{fix} [mm]	Wood and chipboard screws d_s [mm]	Sales unit [pcs]
SX 6 in bucket	507900	6	40	30	—	4 - 5	3200
SX 8 in bucket	507904	8	50	40	—	4,5 - 6	1200
SX 10 in bucket	507909	10	70	50	—	6 - 8	720
SX 12 in bucket	523269	12	80	60	—	8 - 10	350